




HANNA RUBBER COMPANY

# Specification Sheet

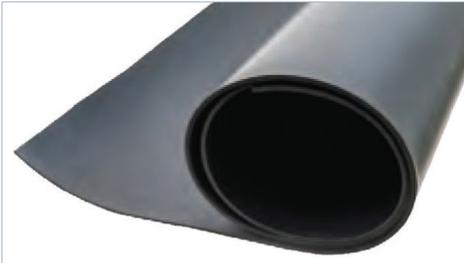

## Hypalon Sheet

CSM/Hypalon® is known for its excellent resistance to extreme temperatures, UV light, weathering, ozone and chemicals. It is most commonly used in automotive and industrial services that require high performance and must withstand extreme weather conditions such as rubber linings, valve seals and gaskets.

### Features

- Excellent resistance to weathering, ozone, and some chemicals
- Good oil resistance
- Made to RMA's specifications
- **Duro:** 60
- **Tensile:** 800 psi
- **Elongation:** 300%
- **Temperature:** -20° to 210 °F
- **Color:** Black

Gauge (in.)	Width (in.)	Length Ft./Roll	Approximate Lbs./Roll	
			36"	48"
1/16"	48	50	-	97
3/32"	36	50	109	-
1/8"	36 or 48	50	145	194
3/16"	48	50	-	290
1/4"	36 or 48	25	145	194
3/8"	36 or 48	25	218	290