




HANNA RUBBER COMPANY

Specification Sheet

K-FLEX ▶ INSUL-SHEET®

INSUL-SHEET®

CLOSED CELL FLEXIBLE ELASTOMERIC
FOAM INSULATION

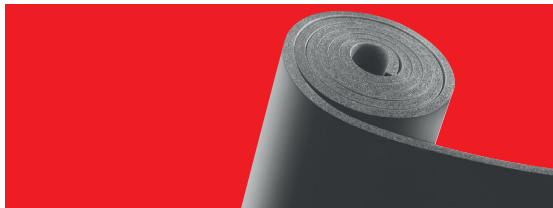

DESCRIPTION ▶

K-FLEX® INSUL-SHEET® is an NBR/PVC-based closed cell, flexible elastomeric foam insulation. It is environmentally-friendly as it is free of CFCs, HFCs, HCFCs, PBDEs, formaldehyde and fibers. An EPA-registered antimicrobial agent is incorporated into the product providing additional protection against mold, fungal and bacterial growth. It is UL GREENGUARD® Gold Certified for low VOC emissions.

AVAILABILITY ▶

K-FLEX® INSUL-SHEET® is black in color and is available in flat sheet (3' x 4') or roll (4' wide) form in thicknesses of 1/8" up to 2". (The product is supplied skin-two-sides in 1/4" thickness and above).

APPLICATION ▶

K-FLEX® INSUL-SHEET® is recommended for applications with service temperatures ranging from -297°F (-182°C) to +220°F (+104°C). For full adhesion applications (i.e. ductwork), the upper temperature limit is +200°F (+93°C). For applications below -40°F (-40°C), contact K-FLEX technical support. The product is used to retard heat gain and prevent condensation or frost formation on below-ambient applications, including utility and industrial process equipment, tanks, vessels, ducts and large OD pipes. It can be used with heat tracing tapes. It also retards heat loss from medium hot surfaces.

OUTDOOR APPLICATION ▶

K-FLEX® INSUL-SHEET® is made from a UV-retardant elastomeric blend. For severe UV exposure (roof-top applications), reduction of surface defects, or for optimum performance, K-FLEX® 374 Protective Coating, approved jacketing or K-FLEX Clad® is recommended.

UNDERGROUND APPLICATIONS ▶

K-FLEX® INSUL-SHEET® is acceptable for use in buried applications using the same installation principles as above ground applications. For lines above the water table, use a clean fill such as sand (3"-5" layer) to protect the insulation before backfilling. For optimum performance, the lines should be encased in a conduit to protect them from problems associated with ground water intrusion and compaction. If a conduit is not used, the insulation thickness should be increased by one thickness size to compensate for compaction.

INSTALLATIONS ▶

K-FLEX® INSUL-SHEET® is flexible (even at low temperatures), durable (non-fracturing and skin is resistant to tearing from handling and environment), safe to handle (non-dusting and non-abrasive), and lightweight for an efficient installation.

K-FLEX recommends that insulation is installed on non-operational systems with clean, dry surfaces in ambient conditions between 40°F and 100°F. Properly sized insulation sheets can be installed onto large OD round surfaces or flat surfaces. For round surfaces (piping or ductwork), the sheet should be wrapped (without stretching the insulation) around the pipe and sealed at the longitudinal seam with an approved contact adhesive. All seams, butt joints, termination points and open ends should be sealed with adhesive, making sure both surfaces to be joined are coated. For ductwork and equipment, 100% coverage of an approved contact adhesive should be used, making sure to coat both surfaces. Compression joints should be used on all butt edges.

Fittings (elbows, tees, p-traps) and special parts (flanges, valves, etc.) can be field-fabricated from insulation sheets. ASTM C1710, Installation Guide for Flexible Closed Cell Foams, and the K-FLEX Installation Manual should be used as comprehensive installation guides.

RESISTANCE TO MOISTURE VAPOR FLOW ▶

The expanded closed cell structure and unique formulation inherently resists moisture vapor intrusion and is considered a Class 1 vapor retarder per ASHRAE. For most indoor applications, K-FLEX® INSUL-SHEET® needs no additional protection. Additional vapor barrier protection may be necessary when installed on cold surfaces that are exposed to continuous high humidity.

FLAME AND SMOKE RATING ▶

K-FLEX® INSUL-SHEET® in thicknesses of 2" (50 mm) and below has a flame spread rating of 25 or less and a smoke development rating of 50 or less as tested to ASTM E84, "Surface Burning Characteristics of Building Materials". It is acceptable for duct/plenum applications, meeting the requirements of NFPA 90A/B.

Numerical flammability ratings alone may not define the performance of products under actual fire conditions. They are provided only for use in the selection of products to meet limits specified when compared to a known standard.

SPECIFICATION COMPLIANCE

- ASTM C534 Type 2, Grade 1
- ASTM D1056-00-2B1
- New York City MEA 186-86-M Vol. V
- USDA Compliant
- CFIA Compliant
- RoHS Compliant
- UL 94-5V Flammability Classification (#E300774)
- ASTM E84 25/50-rated (to 2") - tested to UL 723, NFPA 255 and CAN/ULC S102-03
- FMVSS 302
- FAR 25.853
- NFPA No. 101 Class A Rating
- NFPA 90A, 90B
- MIL-P-15280, Form S
- R-8 (2") meets IECC requirements for Outdoor Ductwork
- UL GREENGUARD® Gold Certified
- Meets energy code requirements of ASHRAE 90.1 and 189.1



Authorized Distributor,
Converter, and Fabricator
www.jbc-tech.com



K-FLEX

The K-FLEX USA website contains the most recent version of all K-FLEX USA literature.
Please refer to the website for current versions of K-FLEX USA literature at www.kflexusa.com

Hanna Rubber Company
908 West 25th Street
Kansas City, Mo. 64108

Phone Number:
816-221-9600

Email Address:
sales@hannarubber.com

Website:
www.hannarubber.com

TECHNICAL DATA ▶

PHYSICAL PROPERTIES	K-FLEX® INSUL-SHEET®	TEST METHODS
Main Composition	Flame-retarded NBR/PVC-based elastomeric foam	
Thermal Conductivity (K) Btu-in/hr-Ft²-°F (W/mK)	90°F (32°C) Mean Temp = 0.258 (0.0372) 75°F (24°C) Mean Temp = 0.245 (0.0353) 32°F (0°C) Mean Temp = 0.235 (0.0339)	ASTM C177
Density	3-6 lb/ft³	ASTM D1667
Operating Temperature Range	-40°F (-40°C) to +200°F (93°C)	ASTM C534
Water Vapor Permeability (Dry Cup)	<0.01 perm-in	ASTM E96
Water Absorption (Volume Change)	0%	ASTM C209
Flame Spread / Smoke Development (up to 2" wall)	<25/50	ASTM E84
Flammability	Self-Extinguishing	ASTM D635
Dimensional Stability	<7% Linear Shrinkage	ASTM C534
Hot Surface Performance (250°F for 96 hours)	No Cracking or Delamination	ASTM C411
Ozone Resistance	Pass	ASTM D1171
Odor Emissions	No Objectionable Odor	ASTM C1304
Chemical/Solvent/Oil/Grease Resistance	Good	Compatibility Data Available on Request
Flexibility	Excellent Pass: Cold Crack Test at -40°F (-40°C)	ASTM C534 ASTM D1056
Mildew Growth Resistance/Air Erosion	Pass	UL 181, ASTM G21
Corrosion Risk	pH neutral: 6.6±0.04	DIN 1988
Leachable Chlorides	<0.05% water-soluble chloride ions	DIN 1988
UV / Weather Resistance¹	Good	ASTM G90
Sound Transmission Class (1")	13	ASTM E90

*For applications below -40°F (-40°C), contact K-FLEX technical support.

¹ Outdoor applications should be protected with an approved K-FLEX® coating or cladding for optimum performance.

THICKNESS RECOMMENDATIONS (TO PREVENT CONDENSATION)

SERVICE TEMPERATURE	50°F (10°C)			35°F (2°C)			0°F (-18°C)			-20°F (-29°C)		
Surface Size	Mild	Normal	Severe	Mild	Normal	Severe	Mild	Normal	Severe	Mild	Normal	Severe
Flat Surface or Pipe ≥48"	1/8"	1/2"	3/4"	1/4"	3/4"	1-1/2"	1/2"	1"	2"	3/4"	1-1/2"	2-1/2"

Thickness listed for the specified ranges will prevent condensation on indoor piping under the defined design conditions. Normal: 85°F and 70% R.H. Mild: Most air conditioned spaces and arid climates: 80°F and 50% R.H. Severe: Areas where excessive moisture is introduced or in poorly ventilated areas where the temperature may be depressed below the ambient: 90°F and 80% R.H. Contact K-FLEX technical support for additional information.

SOUND ABSORPTION COEFFICIENTS AT FREQUENCY (Hz) (ASTM C423)

THICKNESS	125	250	500	1000	2000	4000	NRC
1/2" (12mm)	0.03	0.02	0.06	0.10	0.22	0.27	0.10
1" (25mm)	0.00	0.07	0.13	0.59	0.20	-0.05	0.25
1-1/2" (38mm)	0.00	0.15	0.81	0.29	0.31	0.27	0.40
2" (50mm)	0.22	0.65	0.48	0.54	0.47	0.45	0.55

"R" VALUES (ALL SIZES ARE NOMINAL)

3/8"	1/2"	3/4"	1"	1-1/2"	2"
1.5	2	3	4	6	8