




Hanna Rubber Company  
 908 West 25<sup>th</sup> Street  
 Kansas City, Mo. 64108  
 P: 816-221-9600  
 www.hannarubber.com

Pure Gum Sheet

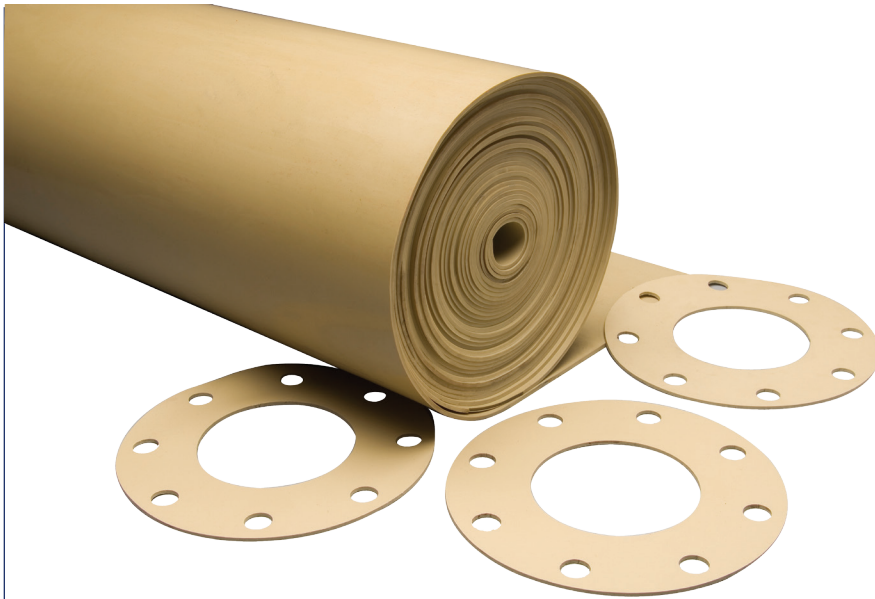

## General Properties and Applications

Premium-grade, high abrasion-resistant, natural rubber sheet used when resiliency, wear, high abrasion, and cushioning are required.

### Note:

- Not recommended for ozone or oil resistance.

## TECHNICAL DATA

Durometer	40 +/-5
Color	Tan
Temperature	-20°F to +160°F
Tensile Strength	3,700 psi
Elongation	700%
Specifications	ASTM D2000-M1-AA421

Width	Gauge	Part Number	Ln. Ft./Roll	Sq. Yds./Roll	Lbs./Roll
36"	1/8"	GUM-4-36	50'	16.6	103
	3/16"	GUM-6-36	50'	16.6	154
	1/4"	GUM-8-36	50'	16.6	205
	3/8"	GUM-12-36	50'	16.6	307
	1/2"	GUM-16-36	25'	8.3	205
	3/4"	GUM-24-36	25'	8.3	307
	1"	GUM-32-36	25'	8.3	410
48"	1/8"	GUM-4-48	50'	22.2	137
	3/16"	GUM-6-48	50'	22.2	212
	1/4"	GUM-8-48	50'	22.2	273
	3/8"	GUM-12-48	50'	22.2	410
	1/2"	GUM-16-48	25'	11.1	273
	3/4"	GUM-24-48	25'	11.1	410
	1"	GUM-32-48	25'	11.1	547