




HANNA RUBBER COMPANY

Specification Sheet

Corrugated FEP Tubing

- Made from FEP fluoropolymer tubing
- Manufactured from FDA compliant materials
- Can be extended or compressed without affecting the tube's I.D.
- Corrugations allow a nearly zero bend radius-easily flexible

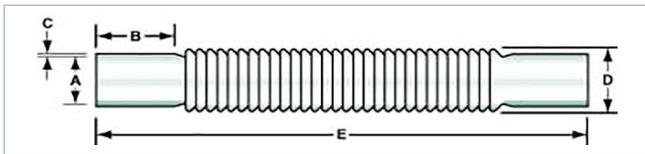

Physical Properties	
Hardness, Shore D	55-60
Tensile Strength, psi	2800-5000
Elongation at Break, %	250-330
Brittle Temperature^^	-450°F
Min. Operating Temp. for Tubing^^	-100°F
Max. Cont. Svc. Temp. for Tubing,	200°F
Zero pressure ^^	

Product Number	(A) MAX ID (in.)	(B) Nominal Cuff Lengths (in.)	(C) Wall (in.)	(D) Corrugation OD (in.)	(E) Maximum Available Lengths - including cuffs (ft.)	Working PSI (at 72°F)	Burst PSI (at 72°F)
16-3400075	.250 (1/4)	.750 (3/4)	0.015	.375 (3/8)	12	62	248
16-3400152	.375 (3/8)	1.000	0.02	.625 (5/8)	12	50	200
16-3400229	.500 (1/2)	1.000	0.025	.750 (3/4)	12	42	168
16-3400306	.625 (5/8)	1.000	0.025	.938 (15/16)	12	37	148
16-3400383	.750 (3/4)	1.500 (1-1/2)	0.03	1.063 (1-1/16)	12	30	120
16-3400460	.875 (7/8)	1.500 (1-1/2)	0.03	1.250 (1-1/4)	12	25	100
16-3400537	1.000	2.000	0.035	1.438 (1-7/16)	12	20	80
16-3400691	1.500 (1-1/2)	2.000	0.035	1.813 (1-13/16)	12	15	60
16-3400768	2.000	2.000	0.04	2.625 (2-5/8)	12	12	48

Hanna Rubber accepts no responsibility for results obtained. Each user of these products, or information, should perform their own tests to determine the suitability of the material. Hanna Rubber does not guarantee that the user will obtain the same results. The data and information are subject to change without notice.