




HANNA RUBBER COMPANY

Specification Sheet

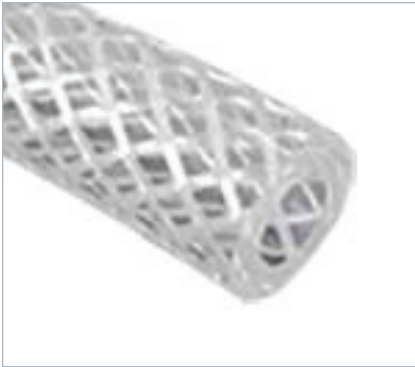

Urebrade Transparent (Clear) Polyurethane Tubing

Physical Properties	
Hardness, Shore A ± 5	85
Tensile Strength, psi	5500
Elongation at Break, %	580
Brittle Temperature	-90°F
Maximum Operating Temperature	175°F

Product Number	ID (in.)	OD (in.)	Wall (in.)	Working PSI (at 70°F)	Burst PSI (at 70°F)	Weight (lbs/100 ft)
16-2200072	.250 (1/4)	.470	.110	250	1000	6.04
16-2200149	.375 (3/8)	.630	.128	190	760	9.78
16-2200226	.500 (1/2)	.750 (3/4)	.125 (1/8)	150	600	11.92
16-2200303	.625 (5/8)	.905	.141 (9/64)	130	520	16.34
16-2200380	.750 (3/4)	1.025	.138	100	400	18.62
16-2200457	1.000	1.300	.150	80	320	26.32
16-2200534	1.250 (1-1/4)	1.710	.230	75	300	51.94
16-2200611	1.500 (1-1/2)	1.930	.215	50	200	56.26
16-2200688	2.000	2.500 (2-1/2)	.250 (1/4)	40	160	85.82

Hanna Rubber accepts no responsibility for results obtained. Each user of these products, or information, should perform their own tests to determine the suitability of the material. Hanna Rubber does not guarantee that the user will obtain the same results. The data and information are subject to change without notice.