




HANNA RUBBER COMPANY

Specification Sheet

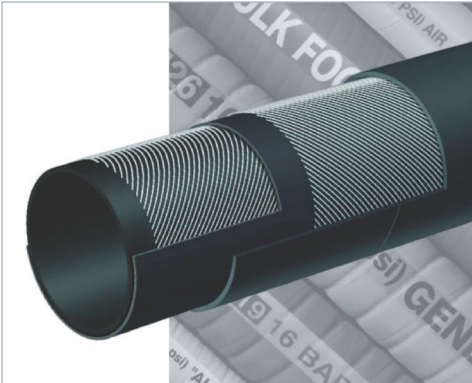

Soft Wall Radiator Hose SAE J20 R1 (ZZ-H-428 Type)

Construction

Tube: Black Synthetic Rubber

Reinforcement: High tensile textile cords

Cover: Black Synthetic Rubber - abrasion, ozone and hydrocarbon resistant

Working Pressure

Constant Pressure - 5 Bar (75 PSI)

Service Temperature Range

-22 °F (-30 °C) to +212 °F (+ 100 °C)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T653AA100	1	25	1.38	35	75	12.5	0.43
T653AA112	1 1/8	28	1.50	38	75	12.5	0.47
T653AA125	1 1/4	32	1.65	42	75	12.5	0.52
T653AA137	1 3/8	35	1.77	45	75	12.5	0.56
T653AA150	1 1/2	38	1.89	48	75	12.5	0.61
T653AA162	1 5/8	42	2.05	52	75	12.5	0.66
T653AA175	1 3/4	45	2.17	55	75	12.5	0.70
T653AA189	1 7/8	48	2.28	58	75	12.5	0.75
T653AA200	1 7/8	51	2.48	63	75	12.5	0.97
T653AA225	2 1/4	57	2.72	69	75	12.5	1.07
T653AA238	2 3/8	60	2.91	74	75	12.5	1.31
T653AA250	2 1/2	63	3.03	77	75	12.5	1.37
T653AA300	3	76	3.54	90	75	12.5	1.64
T653AA350	3 1/2	90	4.09	104	75	12.5	1.95
T653AA400	4	102	4.57	116	75	12.5	2.18
T653AA450	4 1/2	115	5.08	129	75	12.5	2.43
T653AA500	5	127	5.55	141	75	12.5	2.68
T653AA600	6	152	6.61	168	75	12.5	3.26
T653AA662	6 5/8	168	7.24	184	75	12.5	3.57
T653AA800	8	203	8.70	221	75	12.5	4.96

Hanna Rubber accepts no responsibility for results obtained. Each user of these products, or information, should perform their own tests to determine the suitability of the material. Hanna Rubber does not guarantee that the user will obtain the same results. The data and information are subject to change without notice.